



**Figure 24-1**

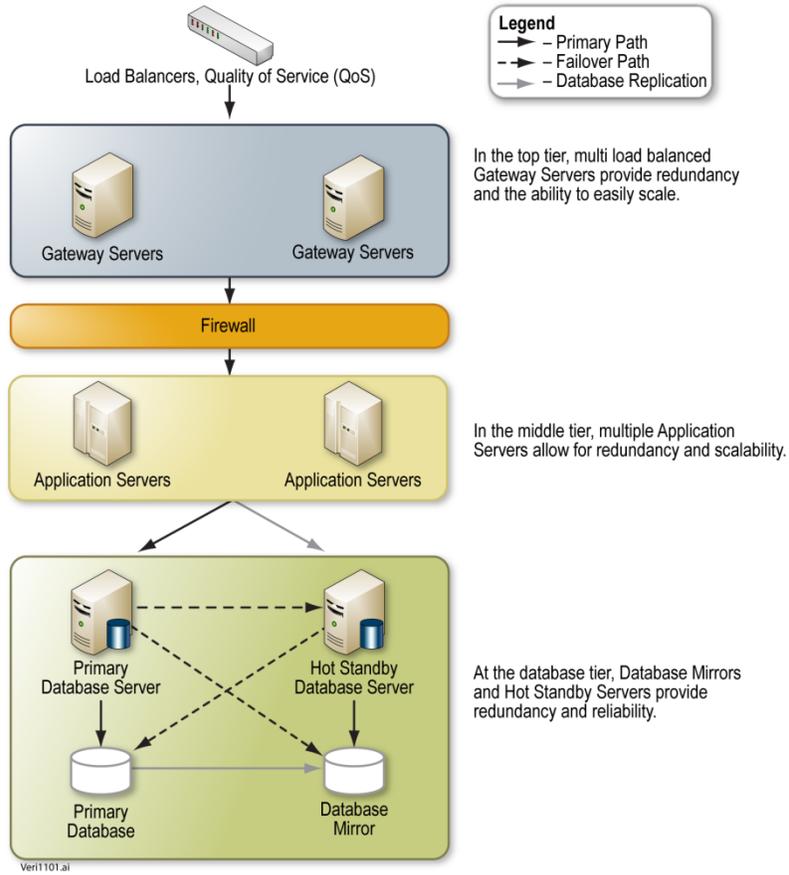


**SRS Architecture.** Verisign's SRS is hierarchically designed to meet the forecasted registration volume of the applied-for gTLD, and it can be scaled to meet future registration volume increases.

**Figure 24-2**

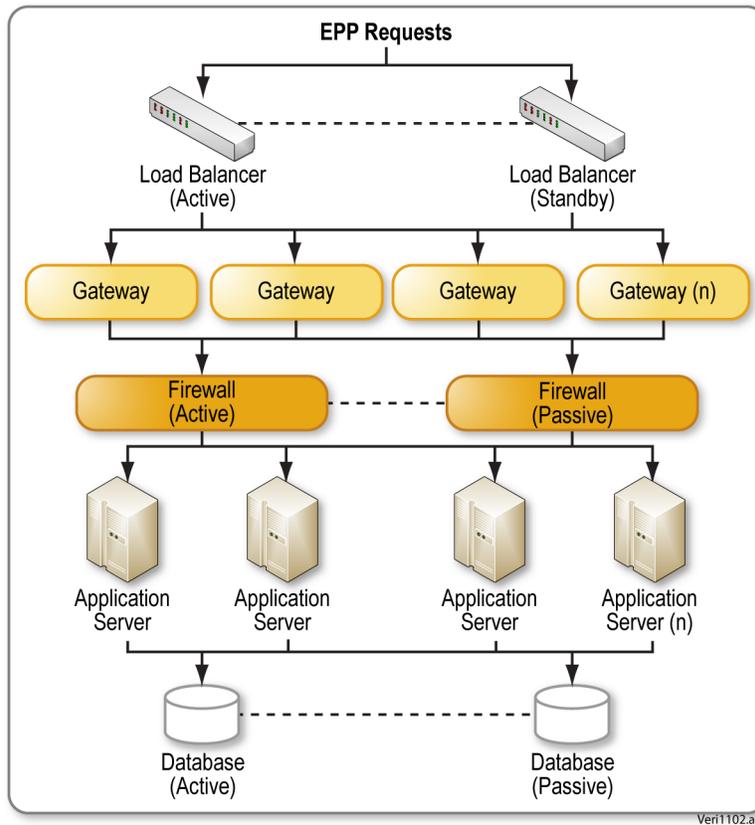


**Built-in SRS Redundancy.** Verisign's SRS system is built upon multiple layers of redundancy to ensure the system remains highly available.

**Figure 24-3**

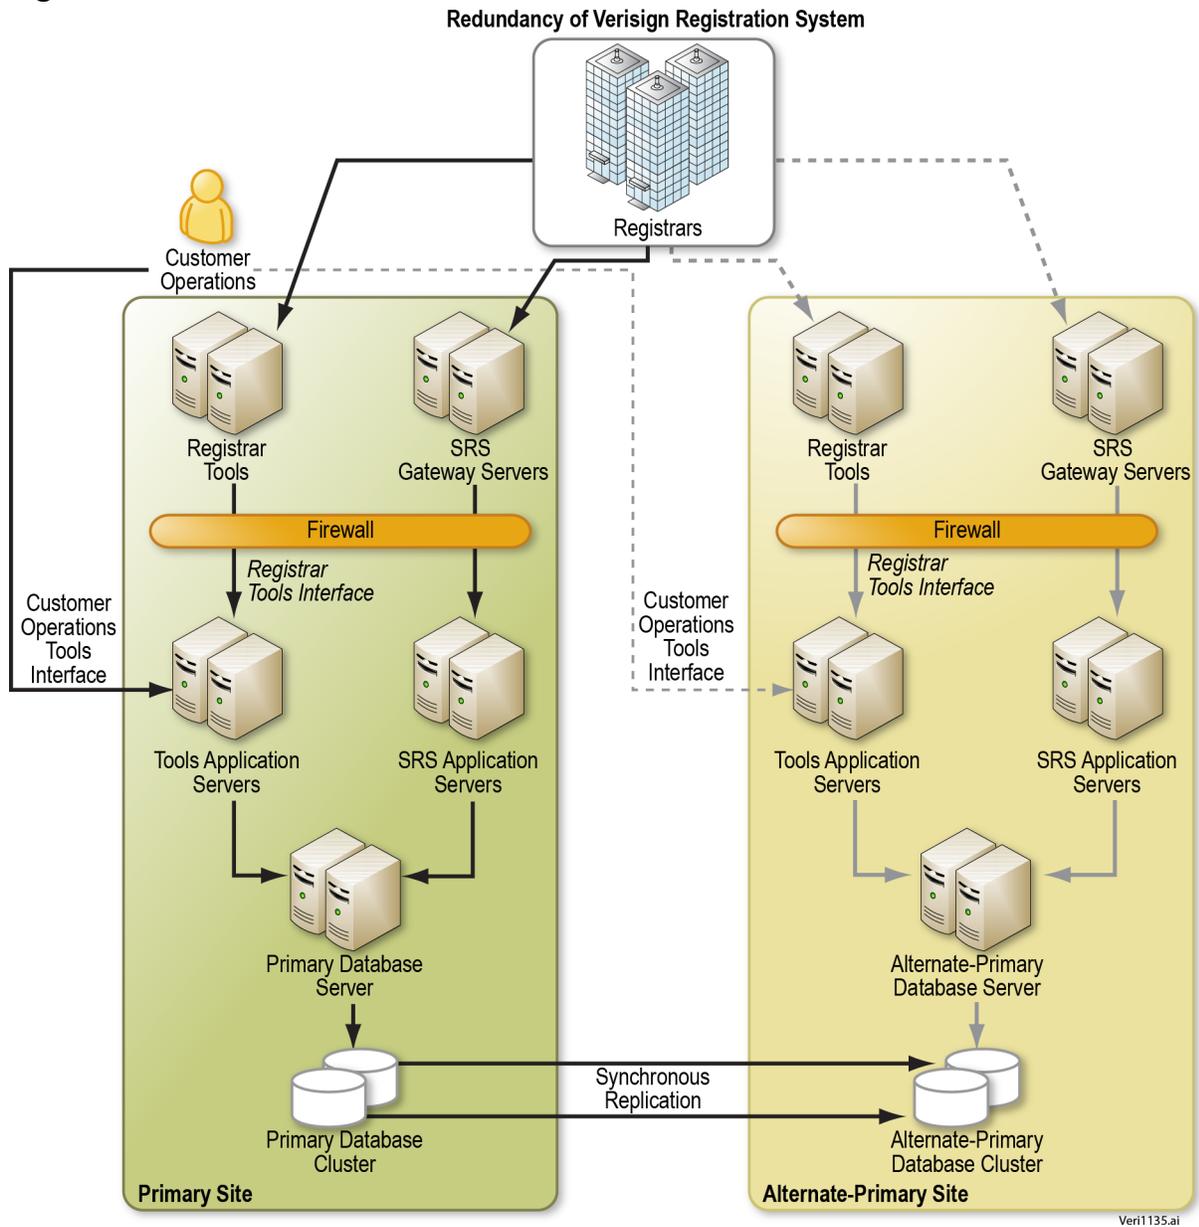

**SRS Network Diagram.** Verisign's fully redundant SRS design and geographically separated data centers help ensure service level availability requirements are met.

**Figure 24-4**

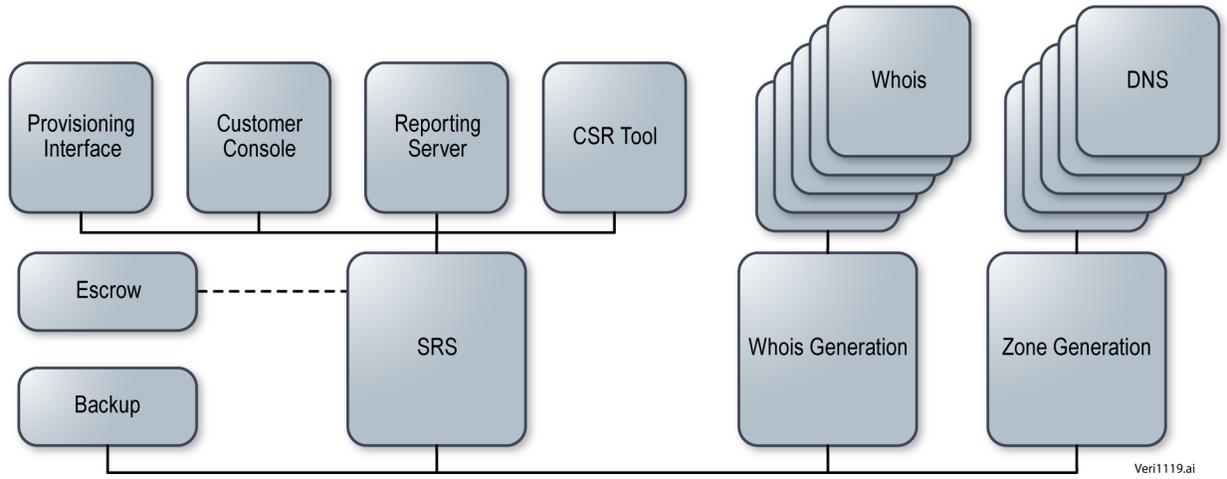

**Technical Overview.** Verisign's SRS provides the registrar-facing component of the system establishing the zone file needed to enable DNS and Whois services.