




**Figure 24-1: SRS Architecture.** *Verisign's SRS is hierarchically designed to meet the forecasted registration volume of the .jaguar gTLD, and it can be scaled to meet future registration volume increases.*

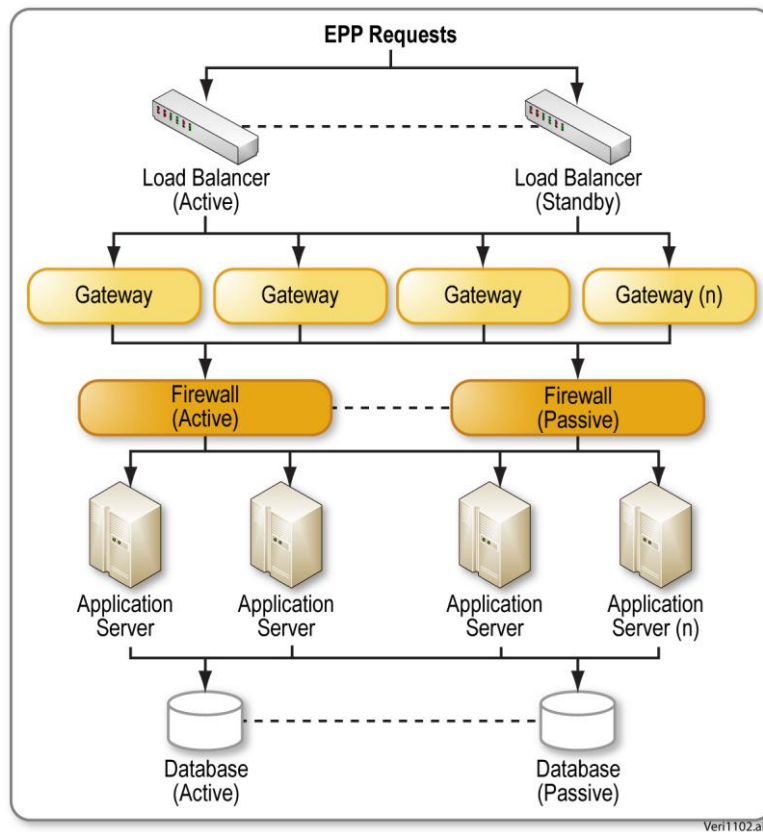

**Figure 24-2: Built-in SRS Redundancy.** *Verisign's SRS system is built upon multiple layers of redundancy to ensure the system remains highly available.*

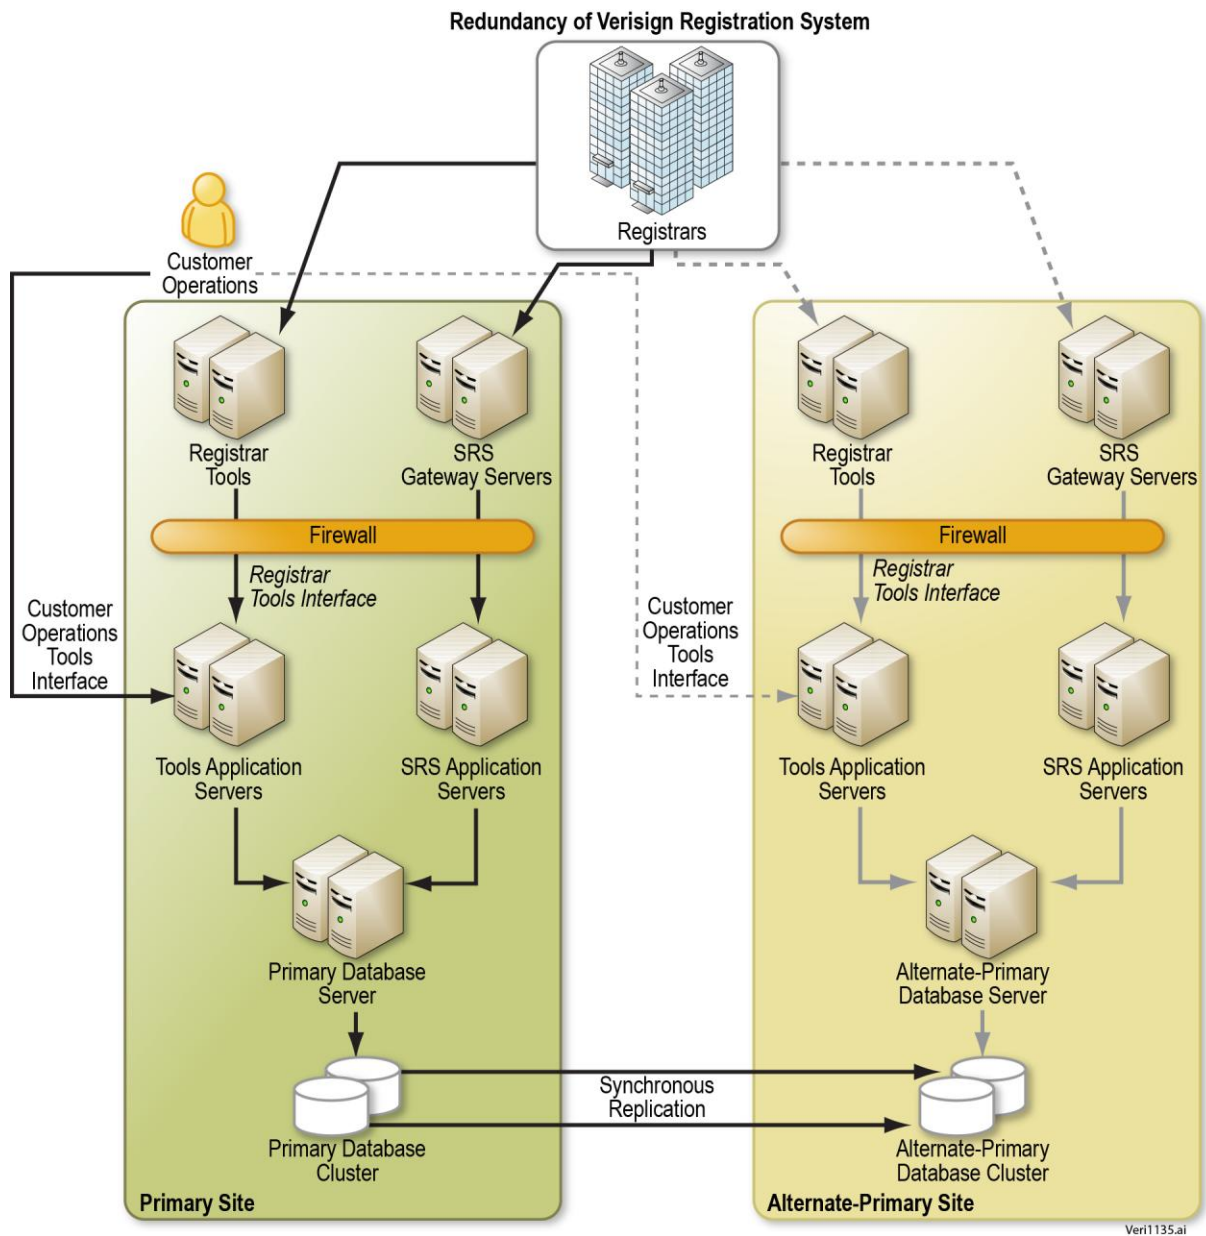

**Figure 24-3: SRS Network Diagram.** Verisign's fully redundant SRS design and geographically separated data centers help ensure service level availability requirements are met.

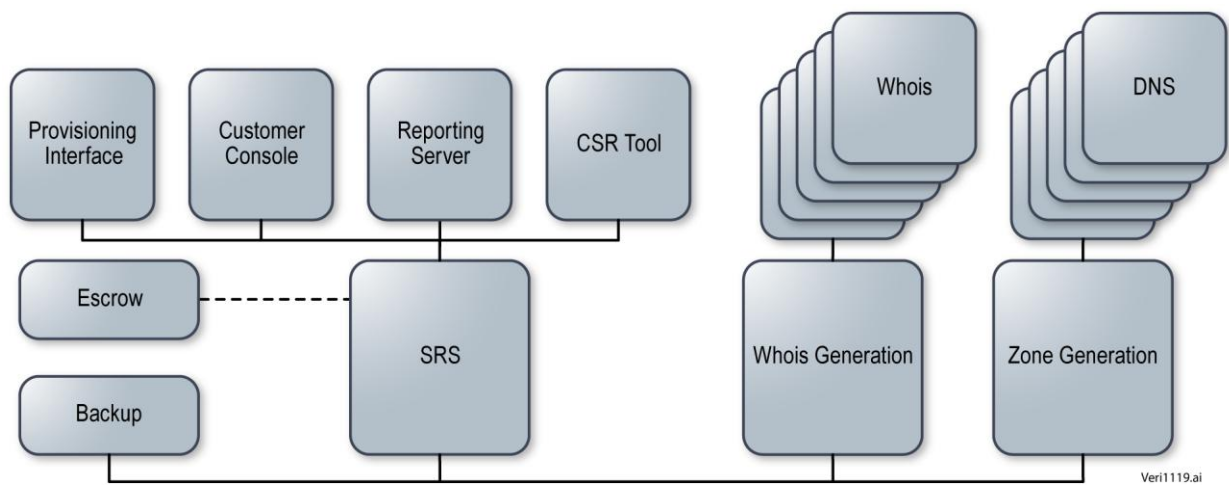

**Figure 24-4: Technical Overview.** *Verisign's SRS provides the registrar-facing component of the system establishing the zone file needed to enable DNS and Whois services.*