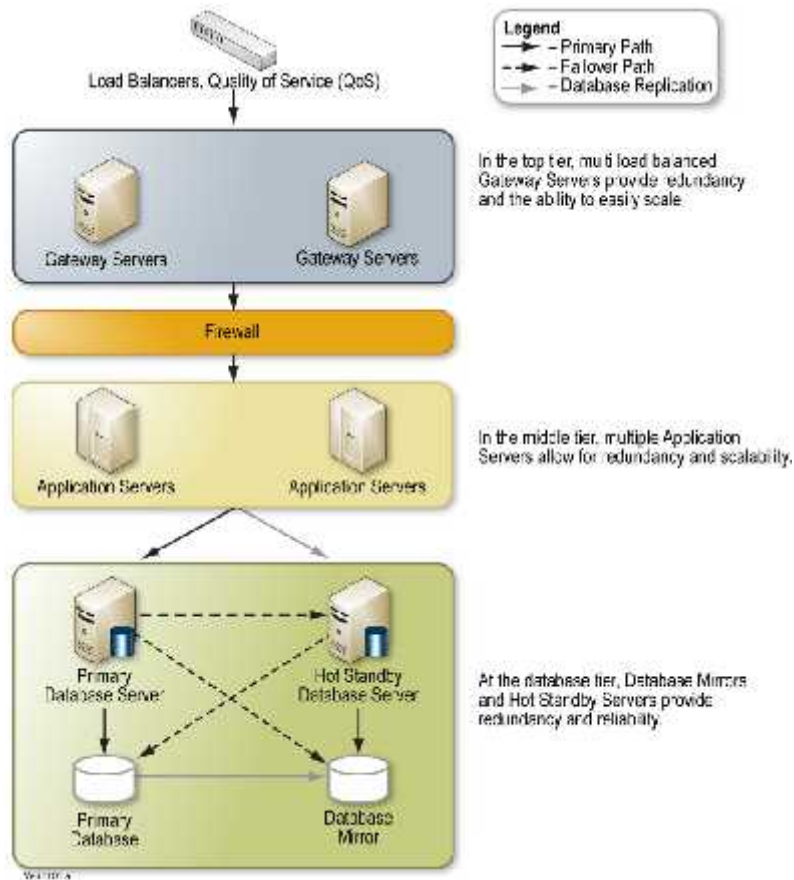
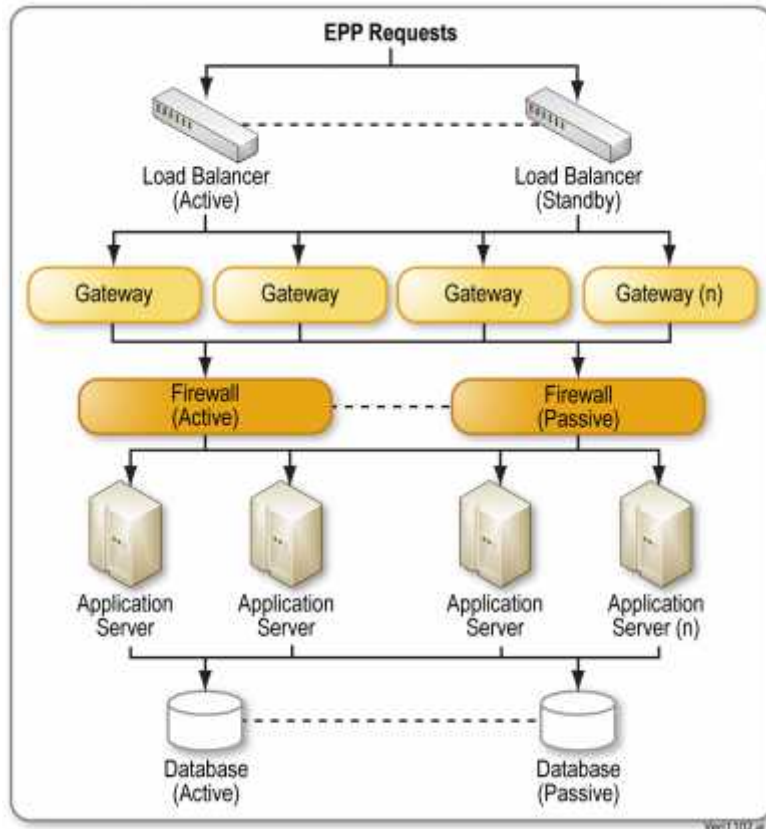


**Figure 24-1**



**Figure 24-1: SRS Architecture.** Verisign's SRS is hierarchically designed to meet the forecasted registration volume for this gTLD, and can also be scaled to meet future registration volume increases.

**Figure 24-2**



**Figure 24-2: Built-in SRS Redundancy.** Verisign's SRS system is built upon multiple layers of redundancy to ensure the system remains highly available.

Figure 24-3

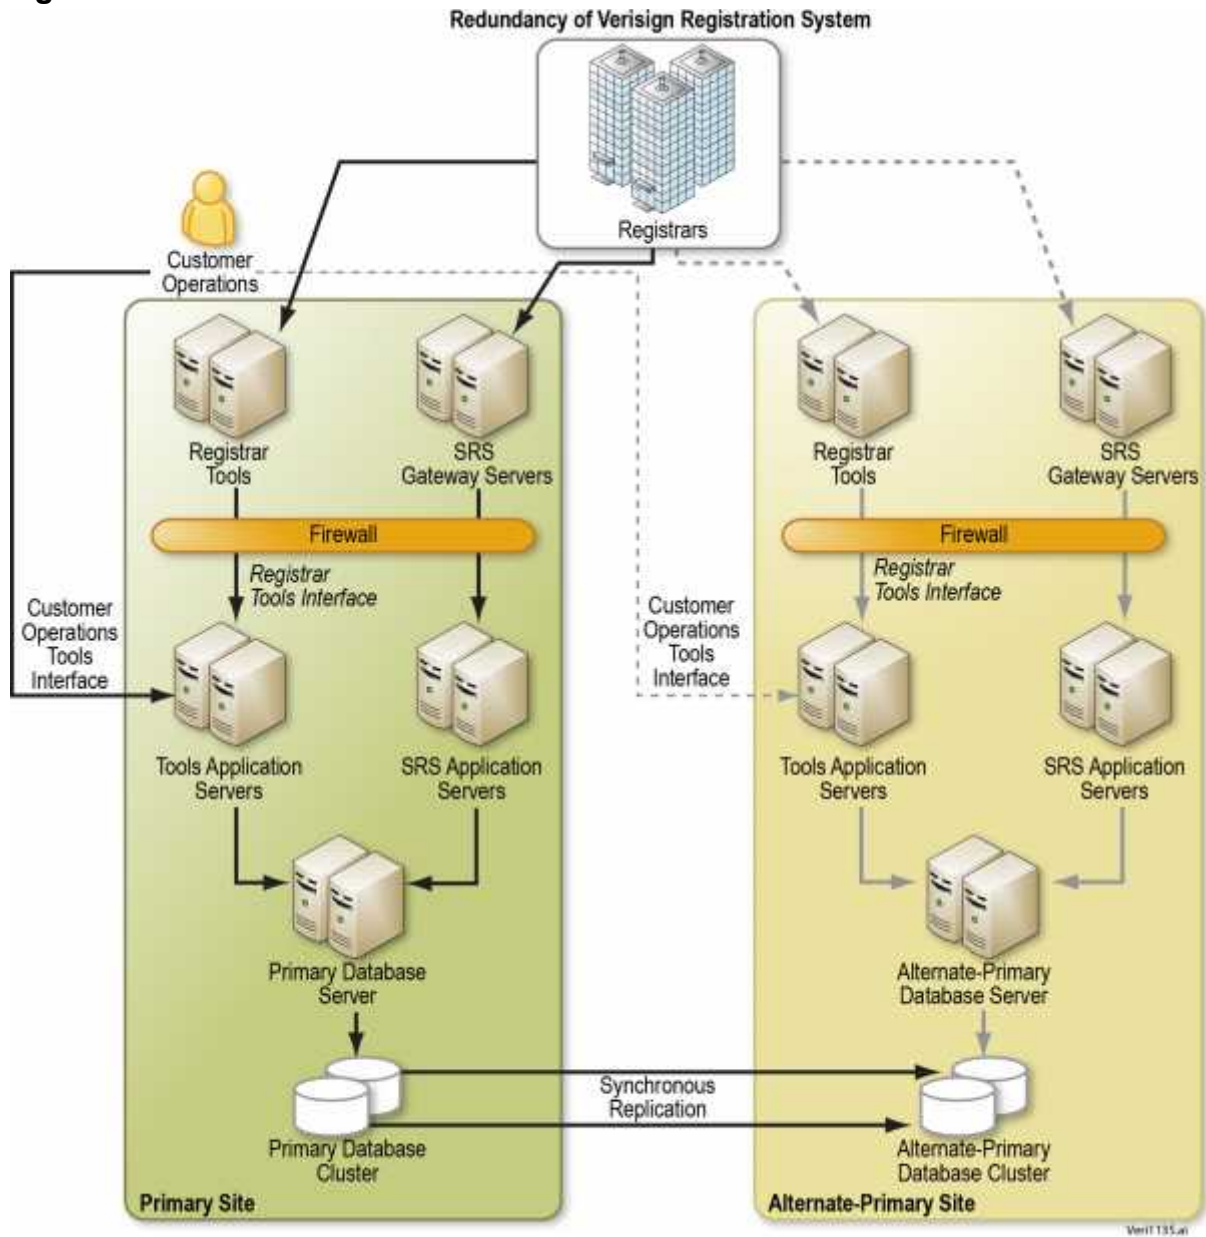
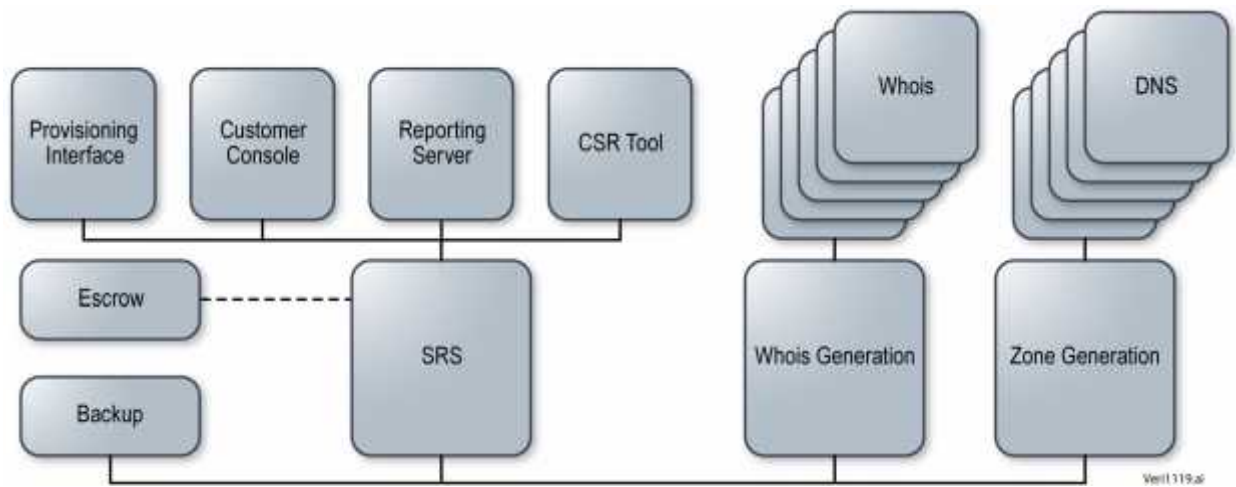


Figure 24-3: SRS Network Diagram. Verisign's fully redundant SRS design and geographically separated data centers help ensure service level availability requirements are met.

**Figure 24-4**



**Figure 24-4: Technical Overview.** Verisign's SRS provides the registrar-facing component of the system establishing the zone file needed to enable DNS and Whois services.